


# MX0400

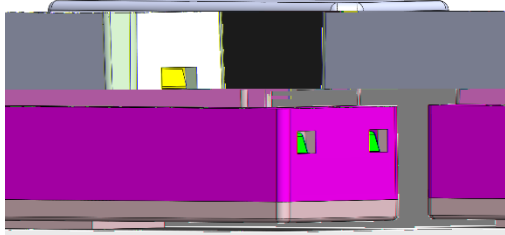


## Description


## Applications

## Features

### Schematic

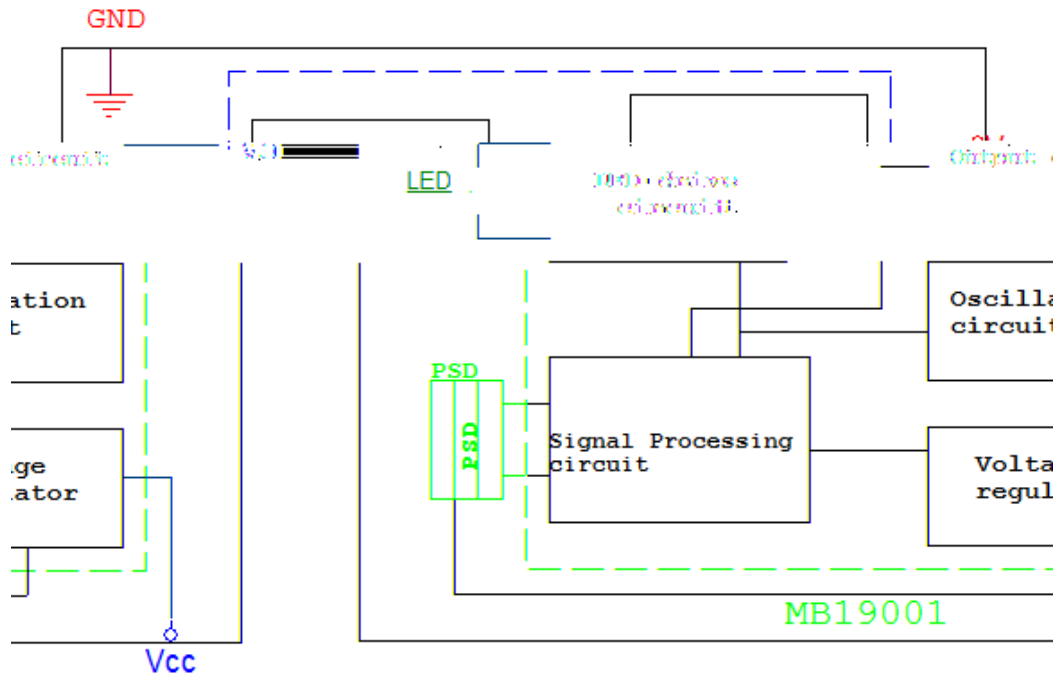

### Outline

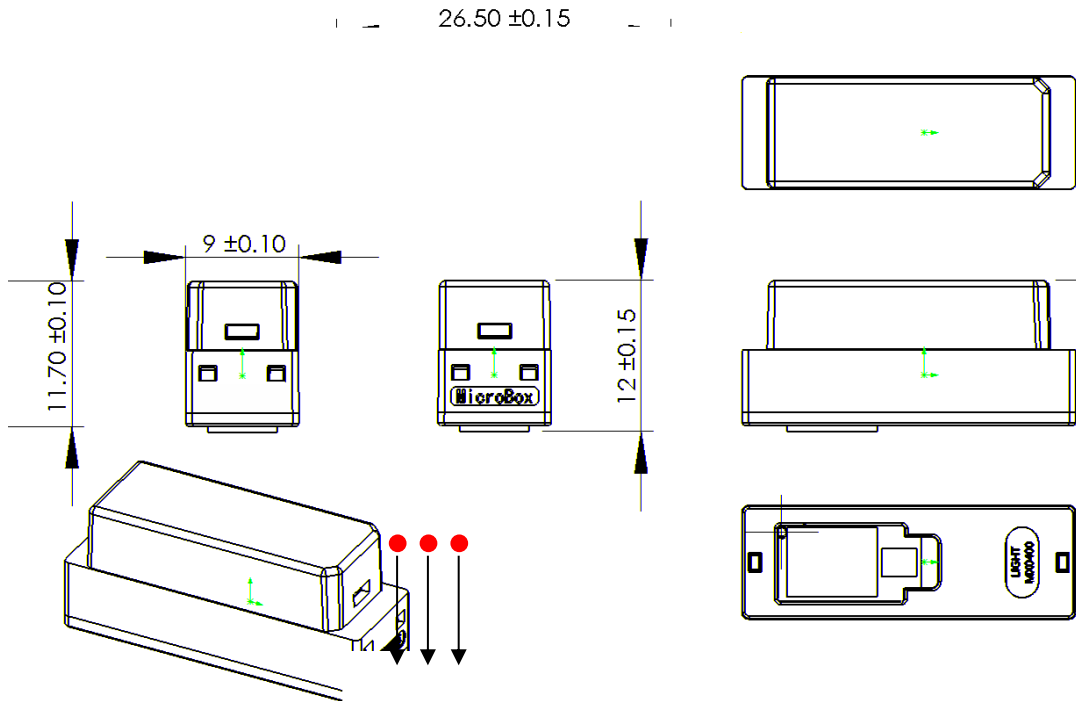

pin	Note
Vcc	4.5V-5.5V
GND	NA
Vo	0-2.5V

### Absolute maximum ratings

Supply voltage	Vcc	0 to +6.8	V
Output terminal Voltage	Vo	-0.3 to +0.3	V
Operating temperature	Topr	-10 to +60	°C
Storage temperature	Tstg	-40 to +70	°C


### Operating supply voltage

Vcc	4.5 to 5.5	V

### Electro-optical characteristics

Measuring distance range		NA	15		150	mm
Output terminal Voltage	Vo	L=20mm		1.81		V
Output voltage difference		15mm-150mm	0.94		2.1	V
Average supply current	Icc	L=150mm		10		mA

### Timing charting

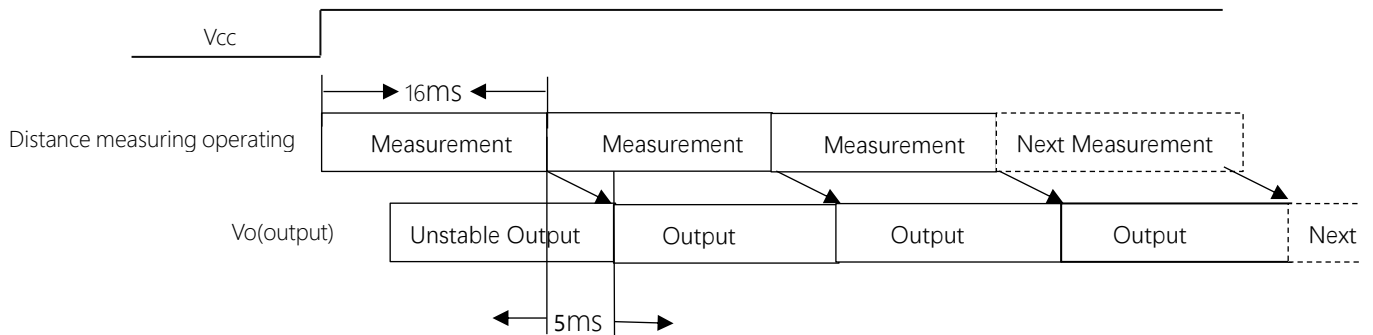



---

■ Notes

- 

