LIGHT ELECTRONICS CO., LTD.



Part No.





Absolute Maximum Ratings at Ta=25℃

Parameter	MAX.	Unit	
Power Dissipation	96	mW	
Continuous Forward Current	30	mA	
Peak Forward Current ^{*2}	100	mA	
Reverse Voltage	5	V	
Electrostatic Discharge (HBM) ^{*3}	2000	V	
Moisture Sensitivity Level ^{*1}	4		
Operating Temperature	-40 to + 85		
Storage Temperature	-40° C to $+ 100^{\circ}$ C		
IR Reflow Temperature	260 for 10 Seconds MAX.		

1. Storage


- (1). Storage requirements before vacuum bag opened: Temperature<30 , Humidity<65%RH;
- (2). Check air leakage and vacuum bag damage before opened. If there is any issue found, check the humidity indicator card immediately after bag opened:
 - a. If color changes on "10% circle" of the humidity indicator card only and not the circles of 20% and above, components can be used without additional handling;
 - b. If color changes on both 10% and 20% circles but not the circles of 30% and above, components must be dehumidified according to the conditions of bullet (5);
 - c. If color changes on 10%, 20%, and 30% circle or above, the product should be returned to the supplier for high temperature dehumidification;
- (3). After bag opened, manual soldering or reflow process must follow the following requirements:
 - a. Complete soldering / reflow within 72 hours;
 - b. Requirements of working environment: Temperature<30 , Humidity<60%RH;
- (4). If the working condition is outside (3)a or (3)b requirement, the components must be dehumidified according to the conditions of bullet (5);
- (5). Low temperature dehumidification: temperature 60 ± 5 , at least 24 hours;
- (6). Shelf life: 180 days. If it's over 180 days from the production date on the package label, the components must be dehumidified according to the condition of bullet (5). If customer is unable to dehumidify, return components to LIGHT for dehumidification.
- 2. Peak Forward Current: Condition for is IFP pulse:

LIGHT

Part No.	SL-T0603GEC020-L55-A	Page	5 of 8





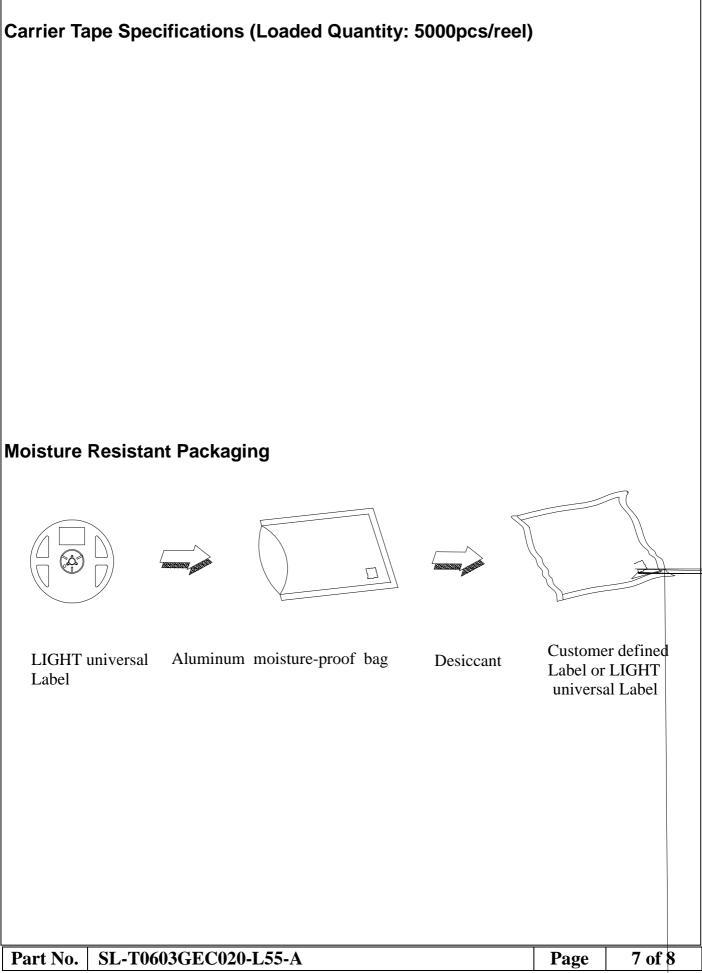


LIGHT

LIGHT ELECTRONICS CO., LTD.



if i suches, set and the tent state is the less reader in the

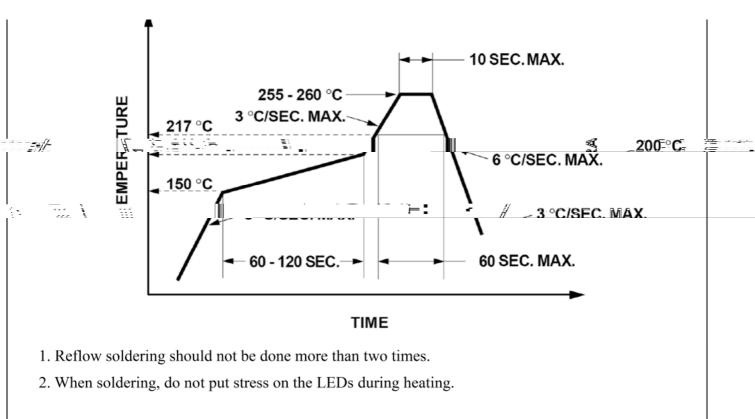

Soldering iron

- 1. When hand soldering, the temperature of the iron must less than 300° C for 3 seconds.
- 2. The hand solder should be done only once.

Repairing

Repair should not be done after the LFDs have been soldered. When repairing is unavoidable a

double-head soldering from should be used (as below figure). It should be confirmed beforehand whether the characteristics of LEDs will or will not be damaged by repairing.

