

P160

P160


600 V
LED 10mA
2500 Vrms

AC

● Schematic




- 1
- 2
- 3
- 4


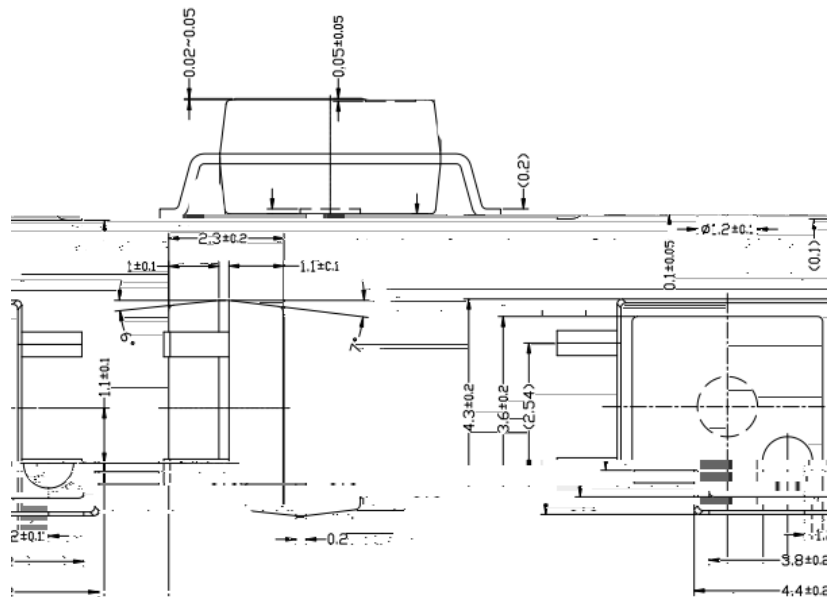


1V

| | | | | | |
|-----|-------|------|----------|--------|-----|
| | | | | | |
| LED | | | IF | 50 | mA |
| | | | VR | 5 | V |
| | | | IFP | 1 | A |
| | | | IF/ | -0.7 | mA/ |
| | | VDRM | 600 | V | |
| RMS | Ta=25 | IT | 70 | mA | |
| | Ta=70 | | 40 | | |
| | Ta 25 | | IT/ | T -0.7 | mA/ |
| | | Tstg | 150 | | |
| | | Topr | 85 | | |
| | | Tsol | 260(10s) | | |
| | | PD/ | -4.0 | mW/ | |
| | | BVS | 2500AC, | | |

LIG




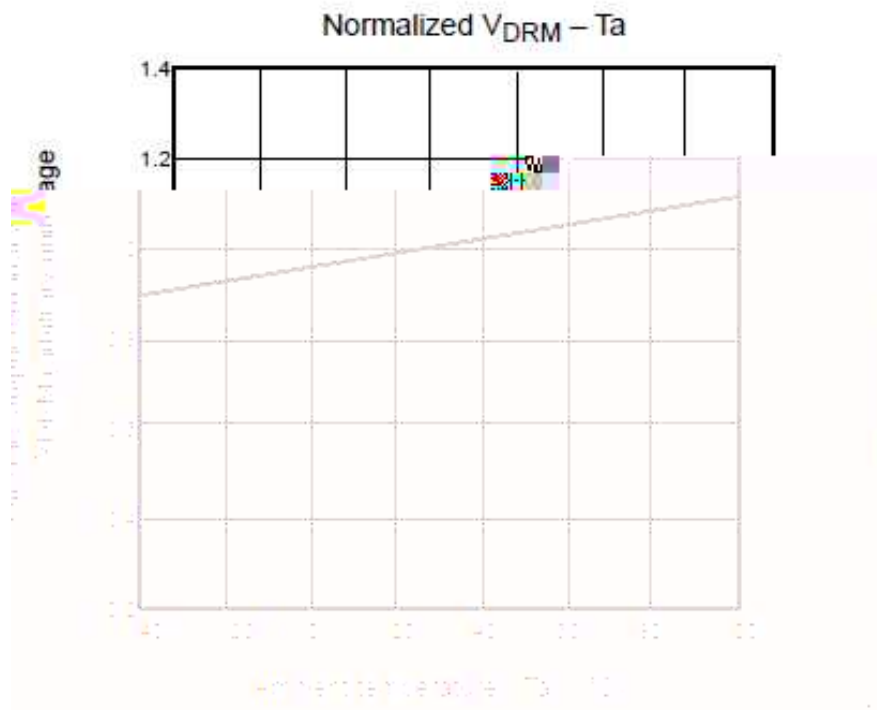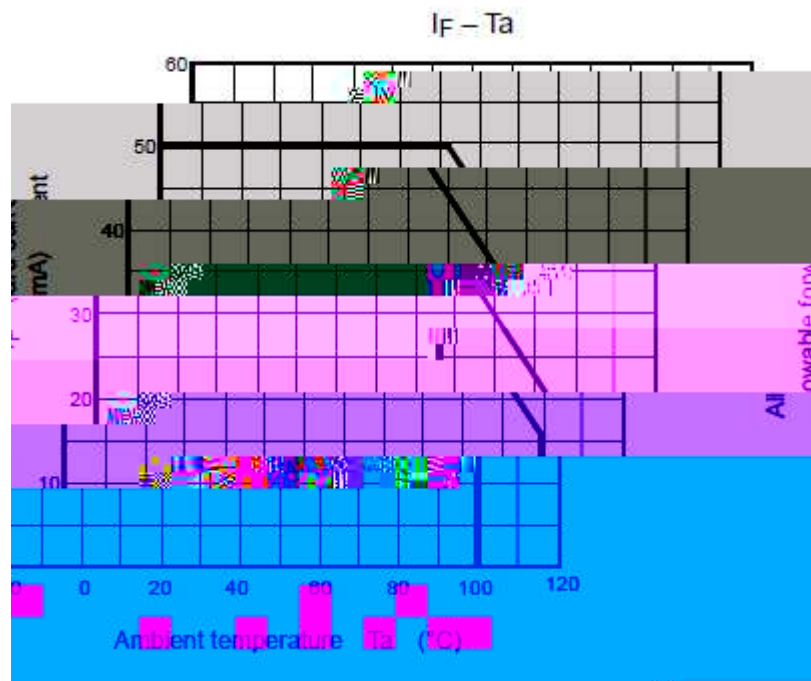


L

| | | | |
|--|--|--|--|
| | | | |
| | | | |

$I_{FP} - D_R$

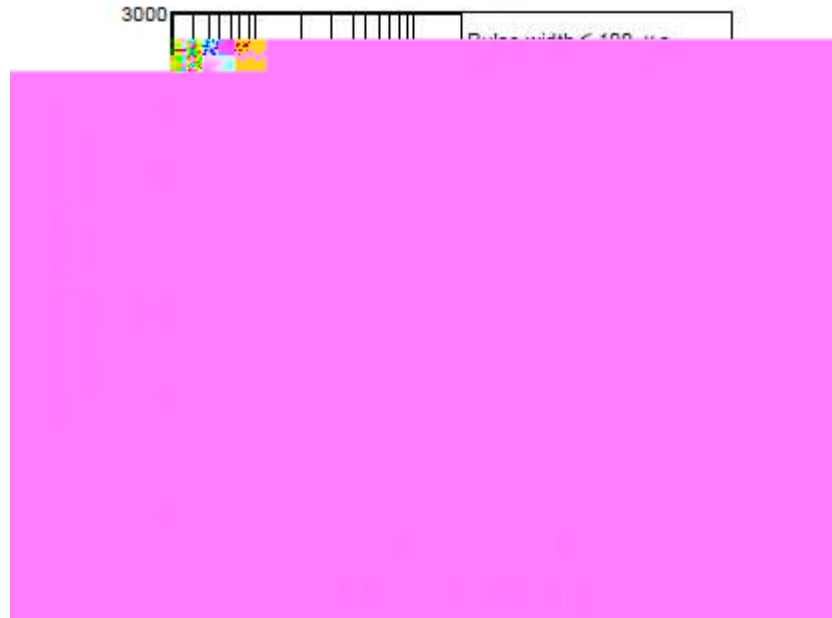

$\Delta V_F / \Delta T_a - I_F$

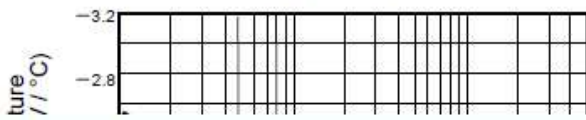

$I_{FP} - V_{FP}$

