




# SL-T4232IRC050-L380-C

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

## Features

## Package Dimension




Notes:

**Absolute Maximum Ratings at Ta=25**


1. Storage and operation instructions:

2. Peak Forward Current:

### Electrical Optical Characteristics at Ta=25

	2					
Peak Wavelength	p	---	940	---	nm	I
		---	50	---	nm	I

**Note:**

2

### Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

Fig.1 Spectral Distribution

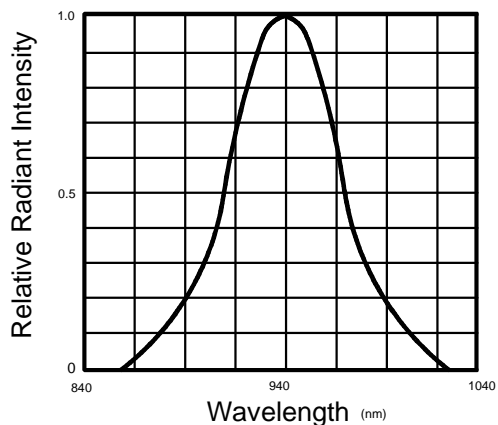


Fig.2 Forward Current Vs Ambient Temperature

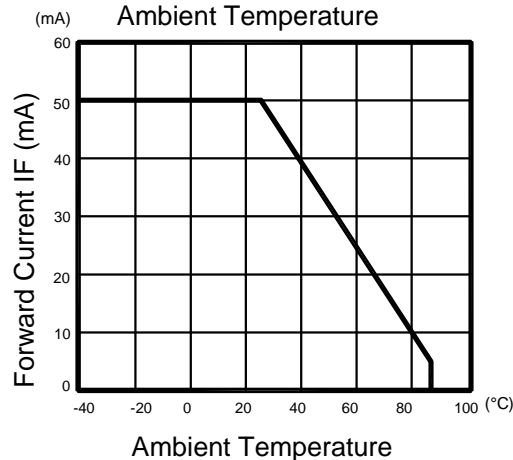


Fig.3 Forward Current Vs Forward Voltage

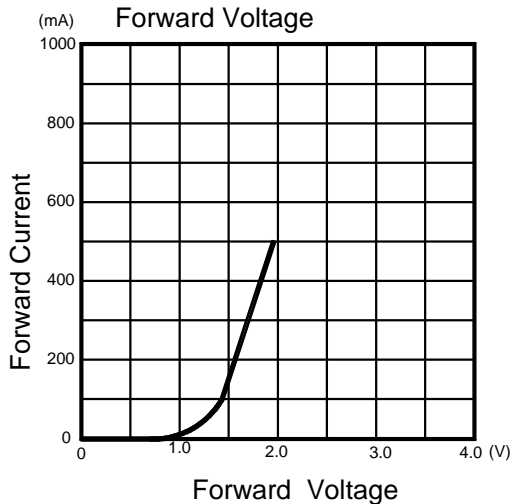


Fig.4 Relative Radiant Intensity Vs Ambient Temperature @IF=50mA

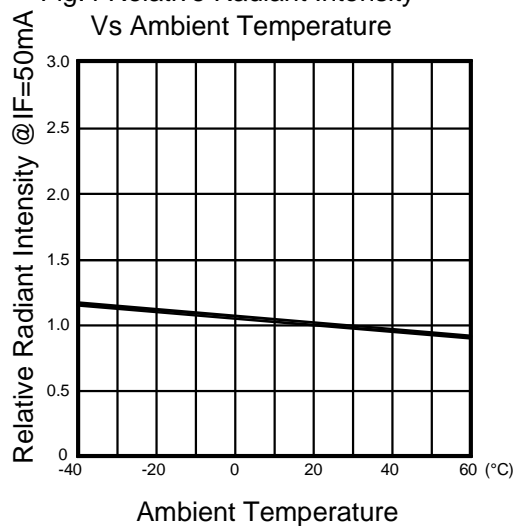


Fig.5 Relative Radiant Intensity Vs Forward Current @IF=50mA


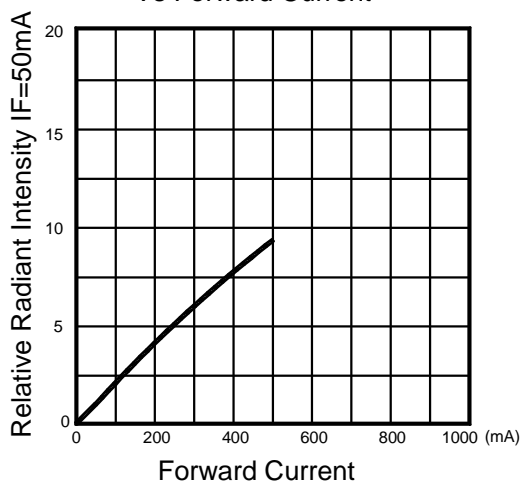


Fig.6 Radiation Diagram

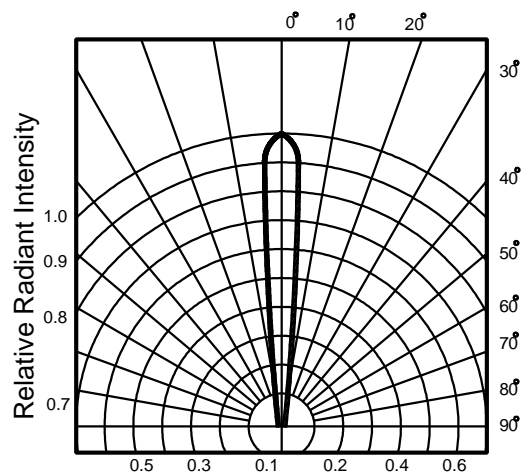

	110	130
	130	155
	155	185
	185	220
	220	260

**NOTE**

**LIGHT**  
Light Electronics CO., LTD.

MODEL NAME: \_\_\_\_\_


QUANTITY: \_\_\_\_\_

BIN: \_\_\_\_\_

PACKING DATE: \_\_\_\_\_

REMARKS: \_\_\_\_\_

LOT NO.: \_\_\_\_\_



**LIGHT**  
Light Electronics CO., LTD.

MODEL NAME: \_\_\_\_\_


QUANTITY: \_\_\_\_\_




BIN: \_\_\_\_\_

PACKING DATE: \_\_\_\_\_

CUSTOMER P/N: \_\_\_\_\_

LOT NO.: \_\_\_\_\_

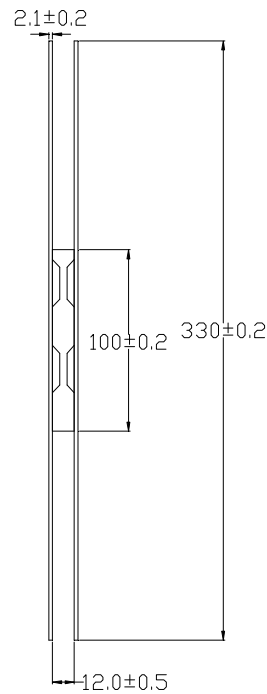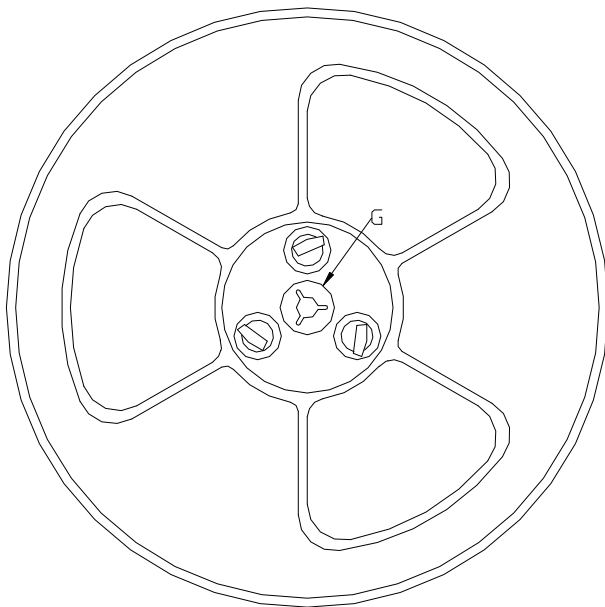

G 区放大图

Note:

