



SL-T3020IRC050-L268-U


Part No.	SL-T3020IRC050-L268-U	Page	1 of 9








Features

Package Dimension









Recommended stencil size

Notes:		

8	Part No.	SL-T3020IRC050-L268-U	Page	2 of 9
---	----------	-----------------------	------	--------



LIGHT ELECTRONICS CO., LTD.



Absolute Maximum Ratings at Ta=25

1. Storage and operating:

- 2. Peak Forward Current:
- 3. Caution in ESD:

Part No. SL-130201RC050-L268-U Page 3 of 9	Part No.	SL-T3020IRC050-L268-U	Page	3 of 9
--	----------	-----------------------	------	--------



Part No.	SL-T3020IRC050-L268-U	Page	5 of 9




LIGHT ELECTRONICS CO., LTD.



	50
 44	53
 53	64
 64	77

NOTE

Part No.	SL-T3020IRC050-L268-U	Page	6 of 9

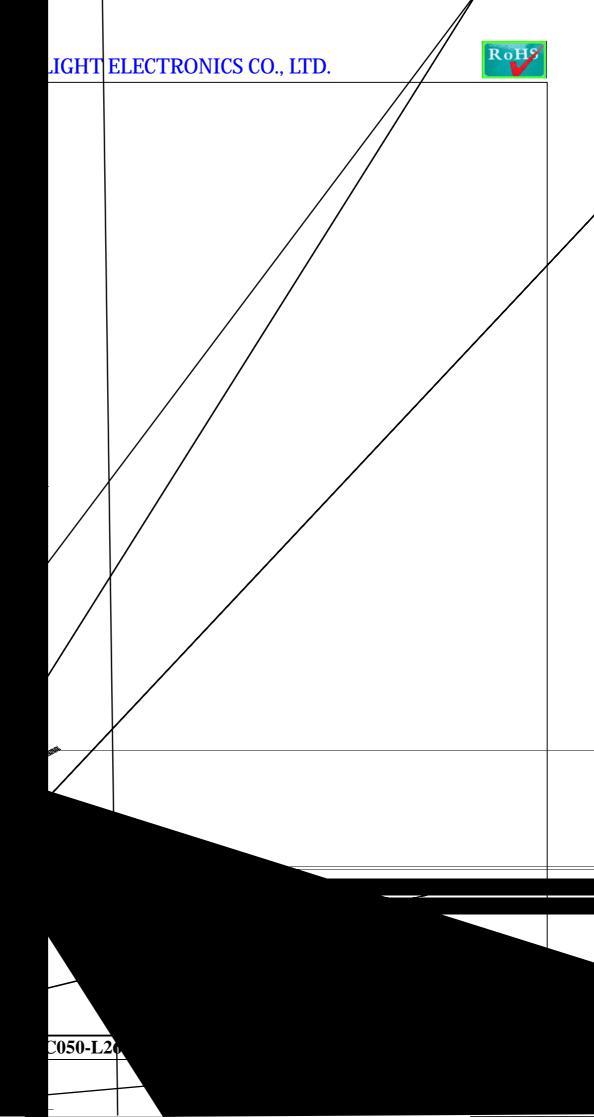

LIGHT

Part No.	SL-T3020IRC050-L268-U	Page	9 of 9