


LI

No.

BB120-L37

Typical Electrical / Optical Characteristics Curves (25°C Ambient Temperature Unless Otherwise Noted)

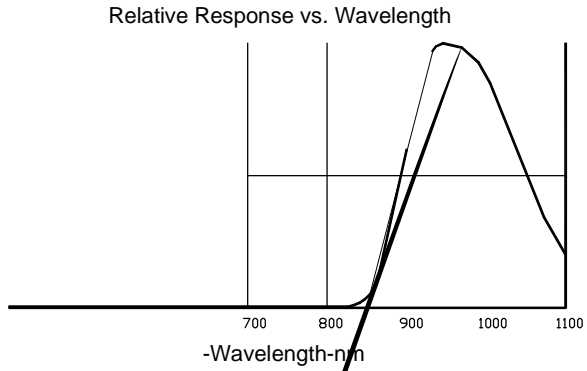

Infrared Pho

Commodity: Infrared Photo diode

Reverse Light Current Bin Limits

BI N CODE	Min. (A)	Mx. (A)
1	26	31
2	31	37
3	37	44
4	44	53

NOTE: The I_L guarantee should be added $\pm 15\%$ tolerance.

Label Example



LIGHT Universal Label



Customer Defined Label



Carrier Tape Specification

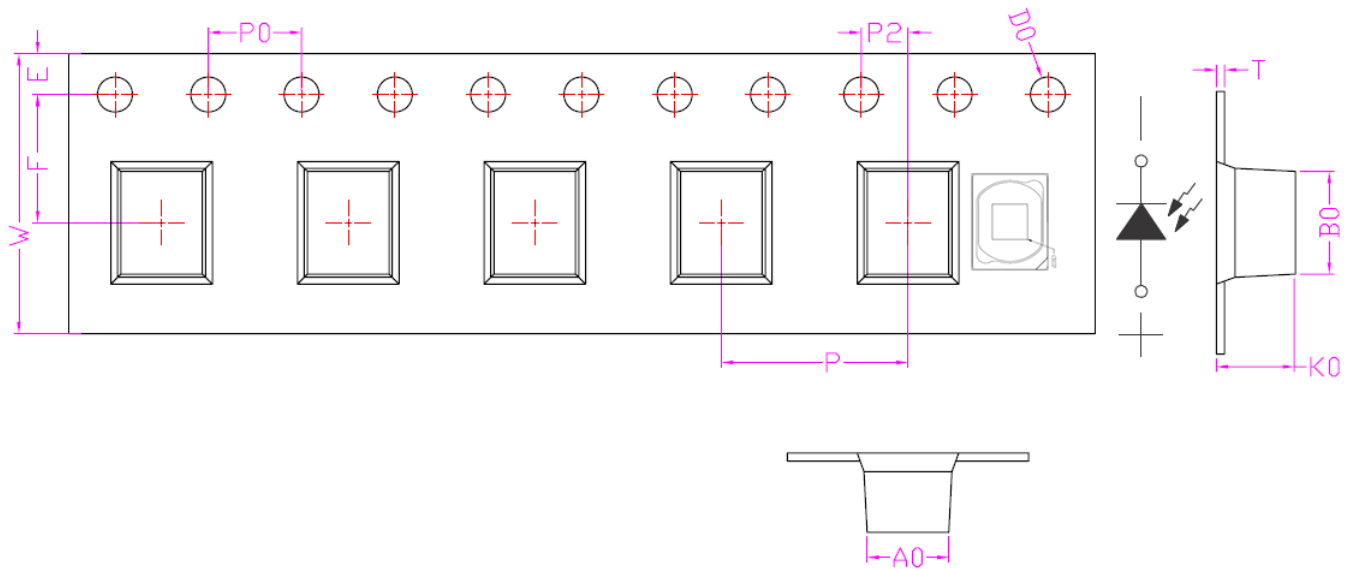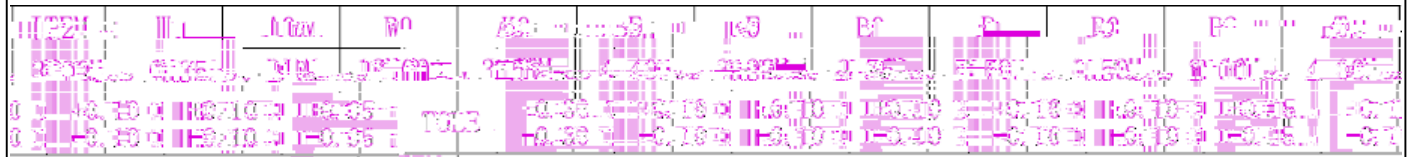

Note: Tolerance unless mentioned is ± 0.1 mm; Unit = mm

Mo

