

SL-T3020IRC050-L236-C-S

□□

□

Absolute Maximum Ratings at Ta=25

<input type="checkbox"/>		
<input type="checkbox"/>	<input type="checkbox"/>	
	<input type="checkbox"/>	
	<input type="checkbox"/>	

1. Storage and operating:

Electrical Optical Characteristics at Ta=25





			□			
	2					
Peak Wavelength	p	---	940	---	nm	I
□		---	50	---	nm	I

Note:

□

2

Typical Electrical / Optical Characteristics Curves (25 Ambient Temperature Unless Otherwise Noted)

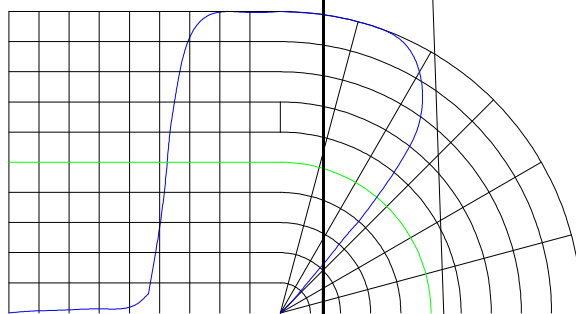


Relative Intensity(X)


LIGHT

LIGHT ELECTRONICS CO., LTD.

Part N



Suggest IR Reflow Condition For Lead Free

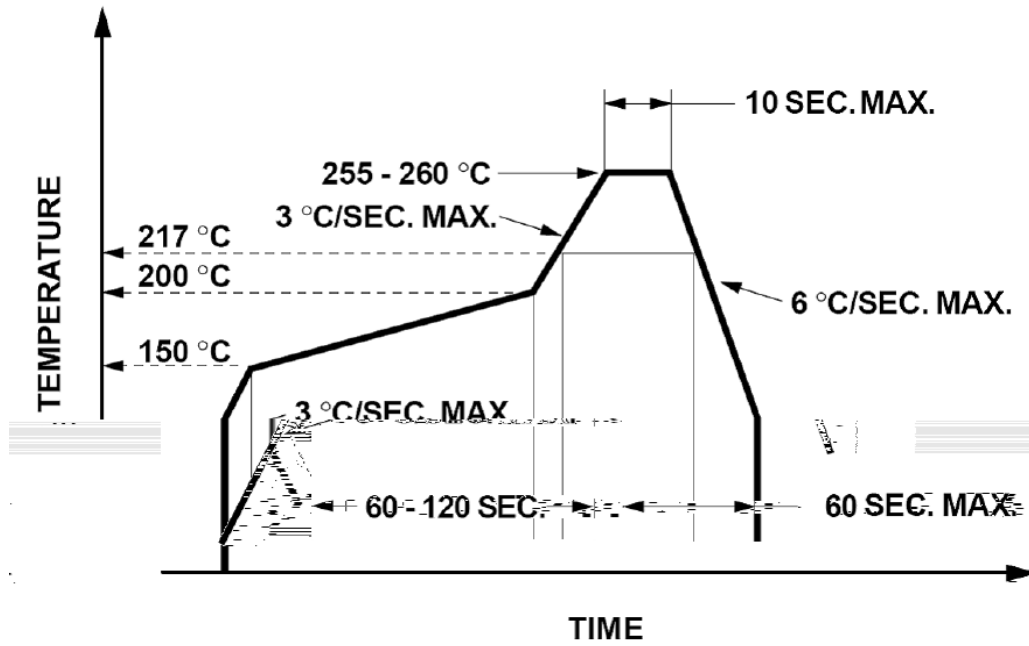

Soldering iron

°C

Repairing

