







## Electrical Optical Characteristics at Ta=25


Parameter	Symbol	Color	Min.	Typ.	Max.	Unit	Test Condition
Luminous Intensity	I <sub>v</sub>	R	35	---	55	mcd	I <sub>F</sub> =5mA
		G	200	---	260	mcd	I <sub>F</sub> =5mA
		B	45	---	65	mcd	I <sub>F</sub> =5mA
Viewing Angle	$\theta_{1/2}$	/	---	120	---	Deg.	(Note 2)
Peak Emission Wavelength		R	---	635	---	nm	I <sub>F</sub> =5mA
		G	---	515	---	nm	I <sub>F</sub> =5mA
		B	---	465	---	nm	I <sub>F</sub> =5mA
Dominant Wavelength		R	620	---	630	nm	I <sub>F</sub> =5mA
		G	520	---	530	nm	I <sub>F</sub> =5mA
		B	465	---	475	nm	I <sub>F</sub> =5mA
Spectral Line Half-Width	$\Delta$	R	---	15	---	nm	I <sub>F</sub> =5mA
		G	---	30	---	nm	I <sub>F</sub> =5mA
		B	---	30	---	nm	I <sub>F</sub> =5mA
Forward Voltage	V <sub>F</sub>	R	1.7	---	2.1	V	I <sub>F</sub> =5mA
		G	2.6	---	3.2	V	I <sub>F</sub> =5mA
		B	2.6	---	3.2	V	I <sub>F</sub> =5mA
Reverse Current	I <sub>R</sub>	---	---	---	10	μA	V <sub>R</sub> =5V

### Note:


- Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve. Tolerance of Luminous Intensity:  $\pm 15\%$ .
- $\theta_{1/2}$  is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- $\lambda_D$  is the dominant wavelength which defines the color of the device. Tolerance of Dominant Wavelength:  $\pm 1.0\text{nm}$ .
- Tolerance of Forward Voltage:  $\pm 0.1\text{V}$ .



## Label Explanation

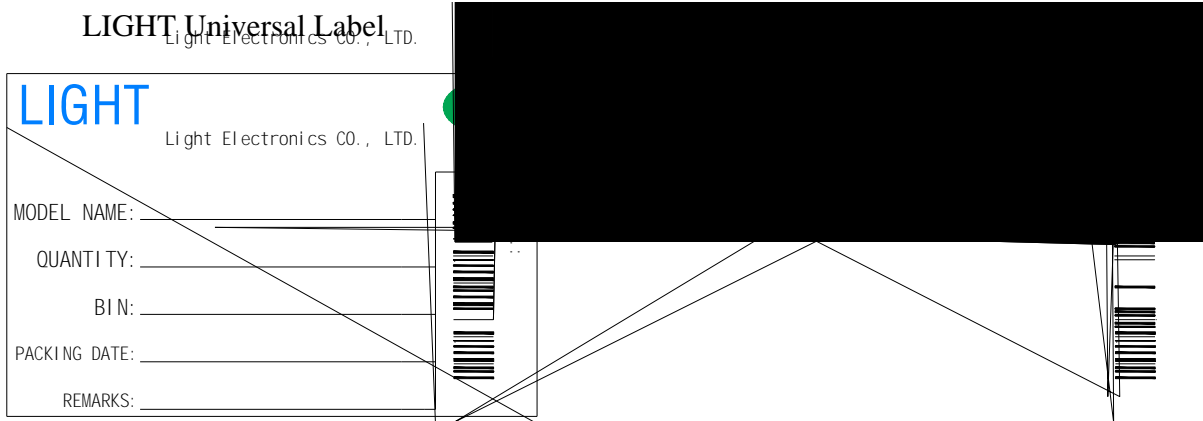

## Reel Dimensions

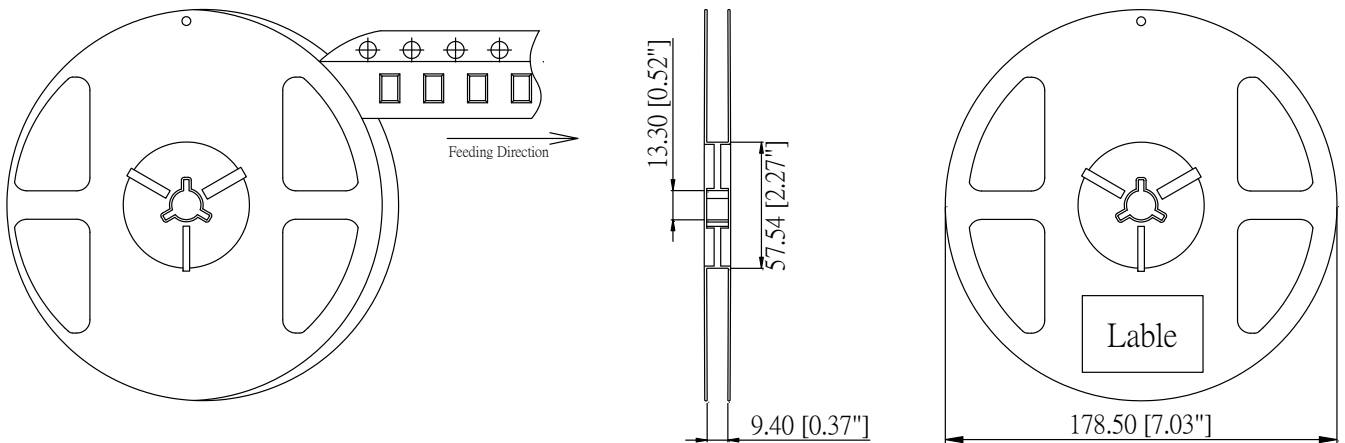

**Note:** Tolerance unless mentioned is  $\pm 0.2\text{mm}$ ; Unit = mm



