



LIGHT



Features

- Pb free product—RoHS compliant
- Low power consumption, High efficiency
- Reliable and rugged
- Long life – solid state reliability
- Good spectral matching to Si photo detector

Package Dimension

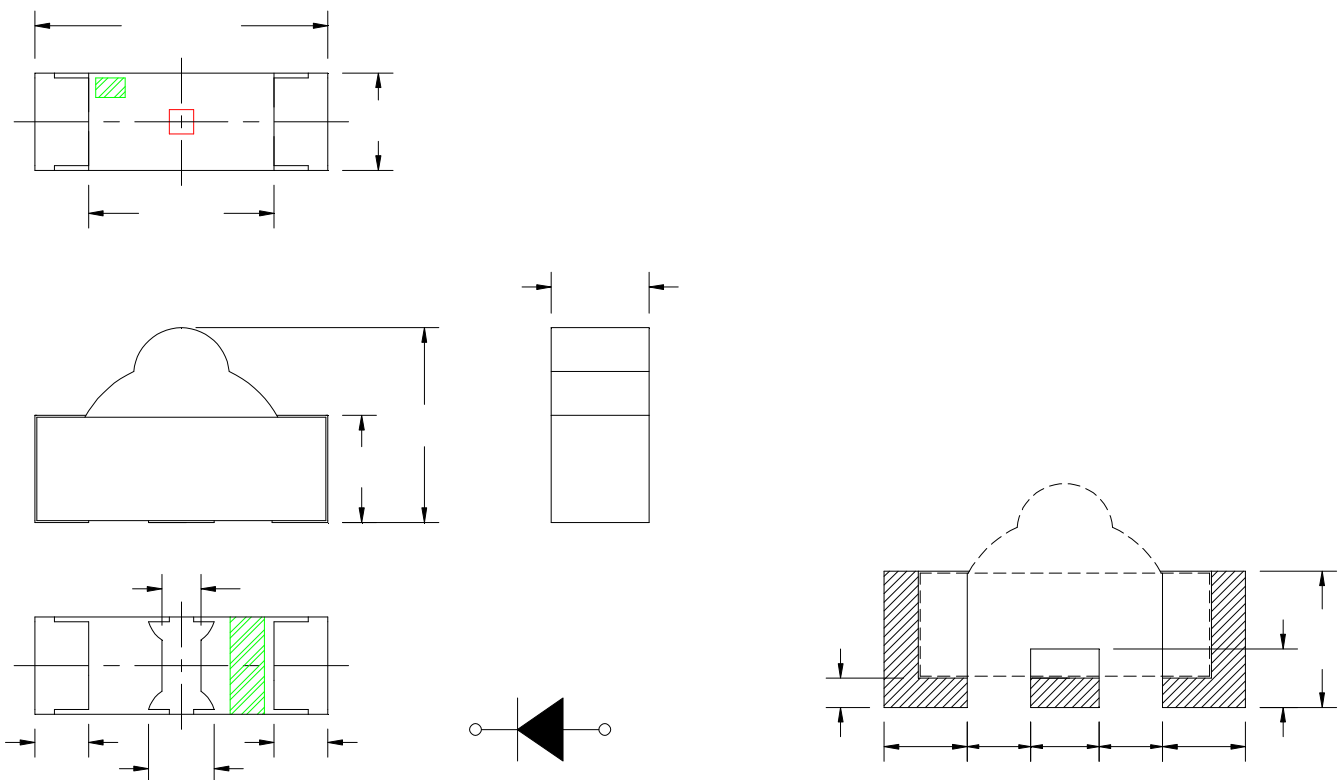


Part NO.	Chip Material	Lens Color
SL-T3010IRC020-L200-Q	AlGaAs	Water Clear

Notes:

1. All dimensions are in millimeters.
2. Tolerance is 0.10mm unless otherwise noted.
3. Specifications are subject to change without notice.


Absolute Maximum Ratings at Ta=25

Parameter	MAX.	Unit
Power Dissipation	75	mW
Continuous Forward Current	30	mA
Peak Forward Current ^{*3}	100	mA
Reverse Voltage	5	V
Moisture Sensitivity Level ^{*1}	4	
Operating Temperature	-40 to + 85	
Storage Temperature	-40 to + 85	

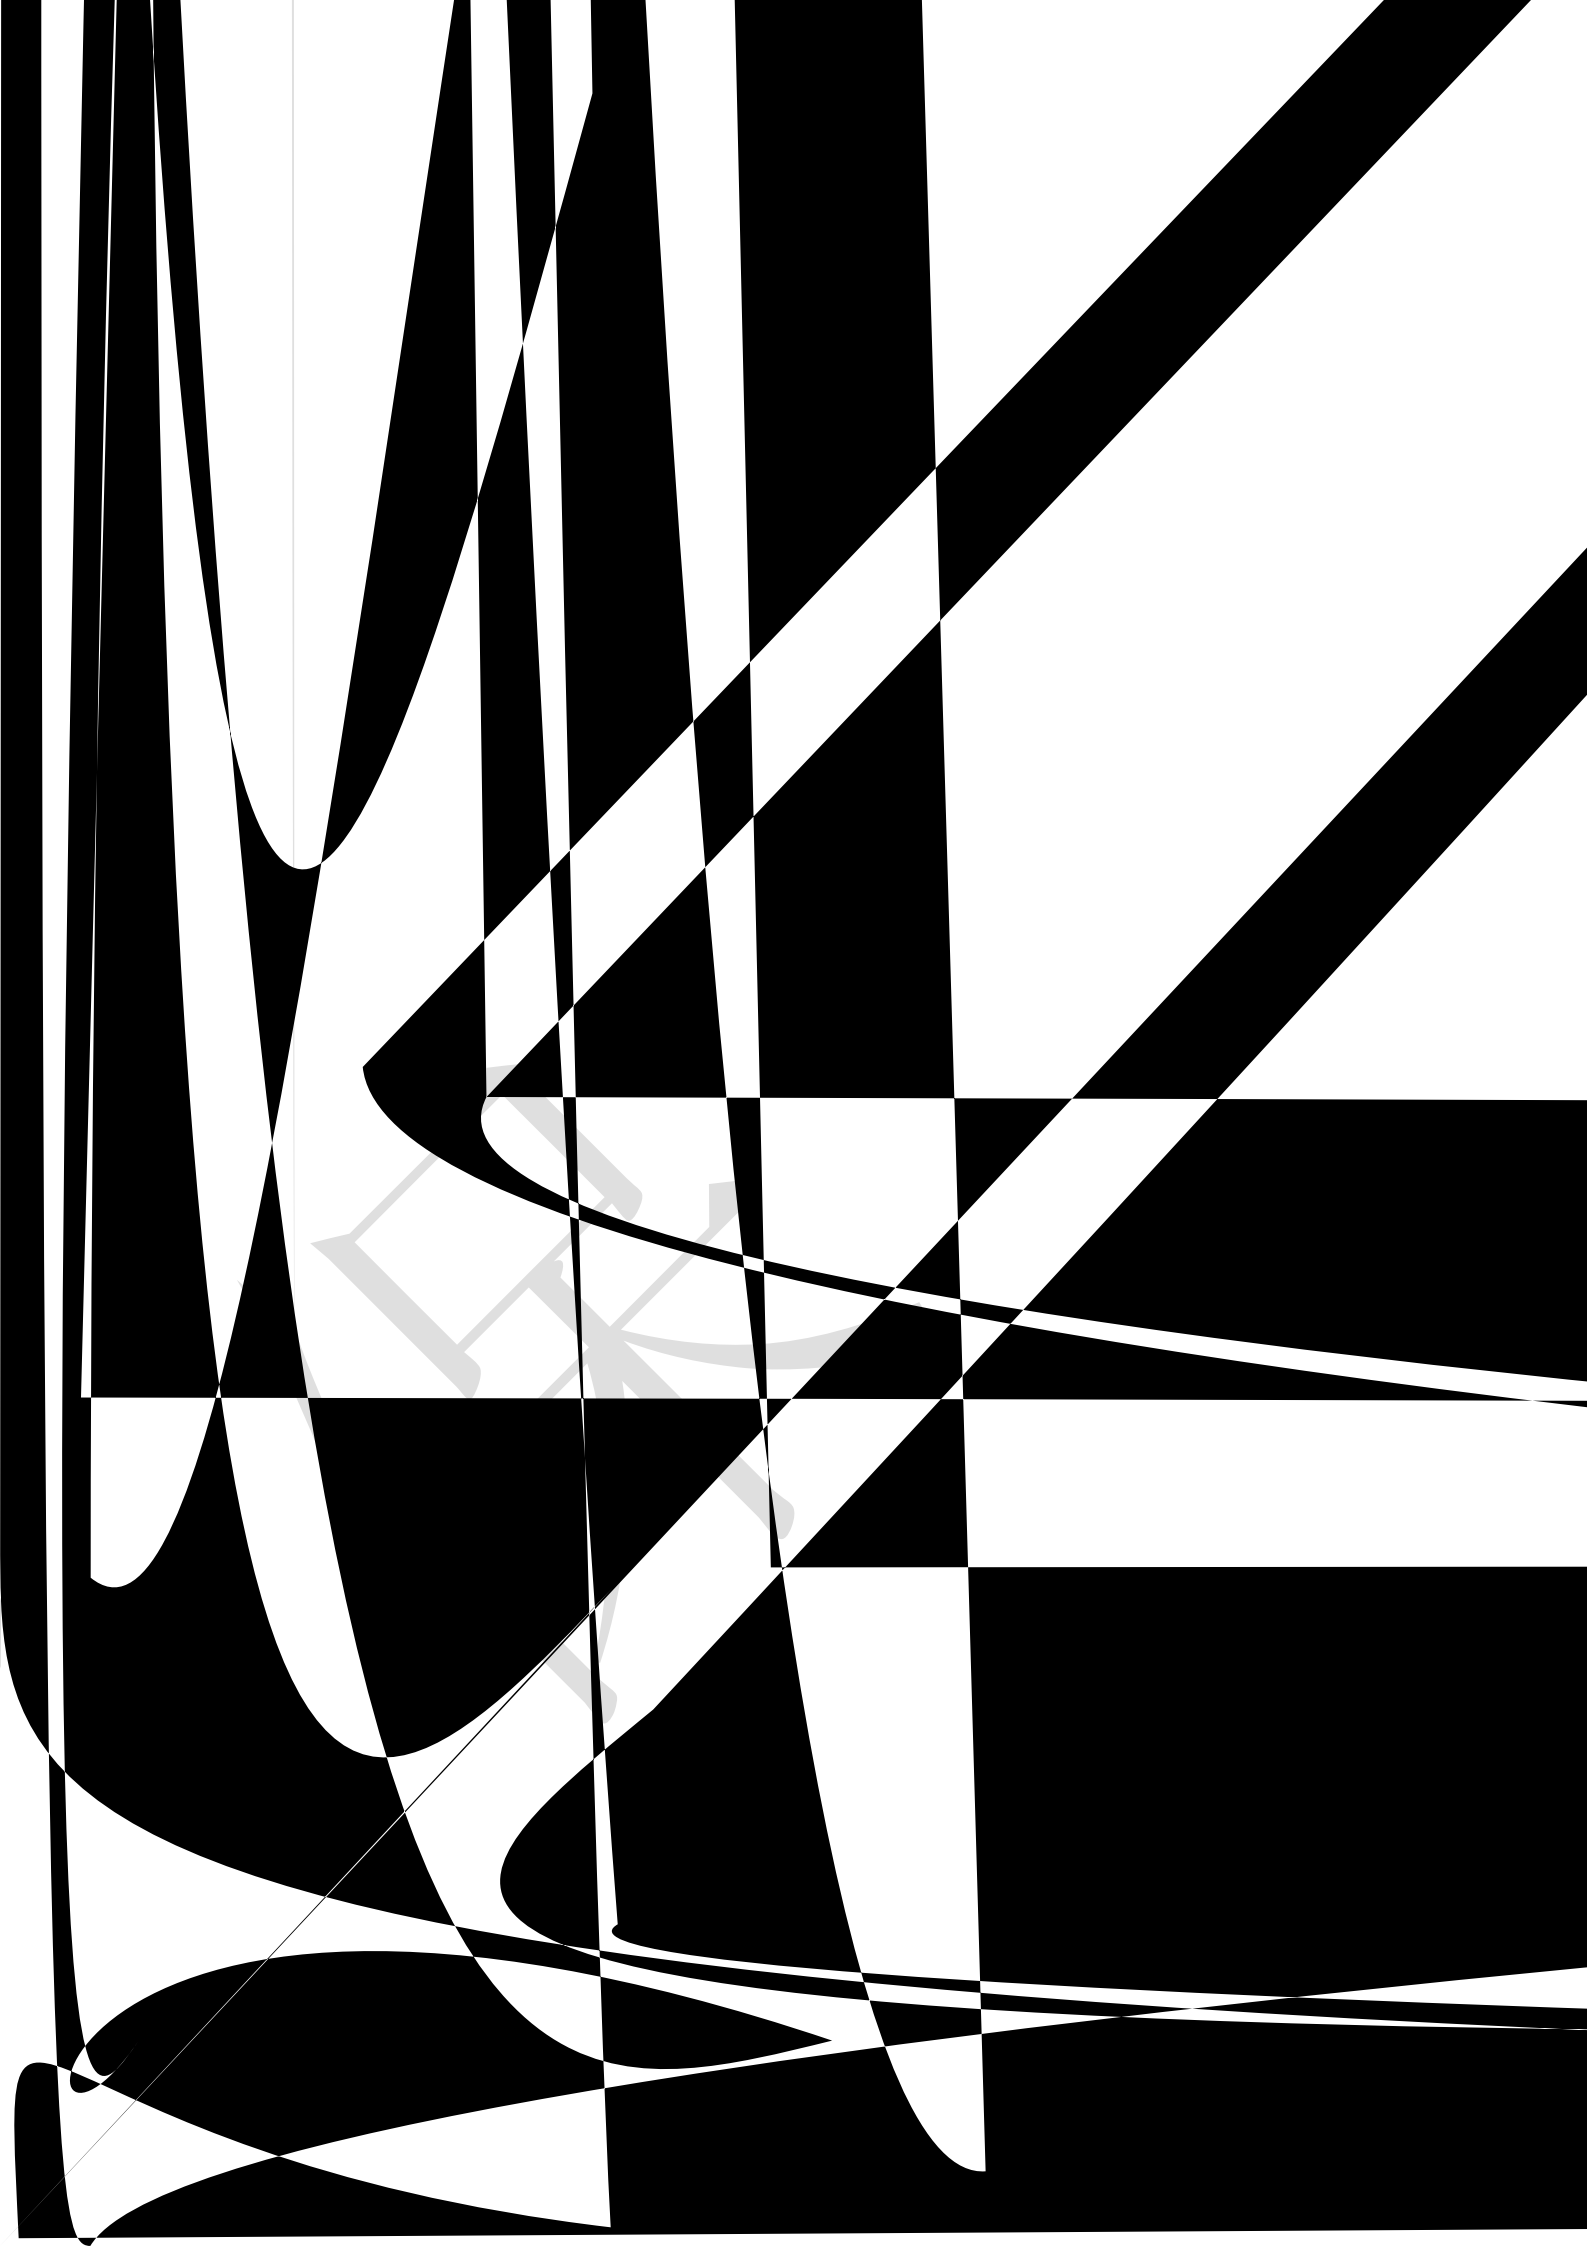

LIGHT 深圳莱特光电股份有限公司 
 Light Electronics CO., LTD.

TYPE NO. : _____
 QUANTITY : _____
 BIN : _____
 DATE CODE : _____
 REMARKS : _____

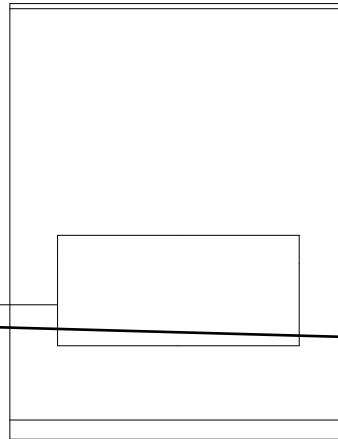

Bag

TYPE NO./	QUANTITY/
BIN./	DATE CODE/
REMARKS/	LOT NO./

