


Features

Package Dimension



Absolute Maximum Ratings at Ta=25

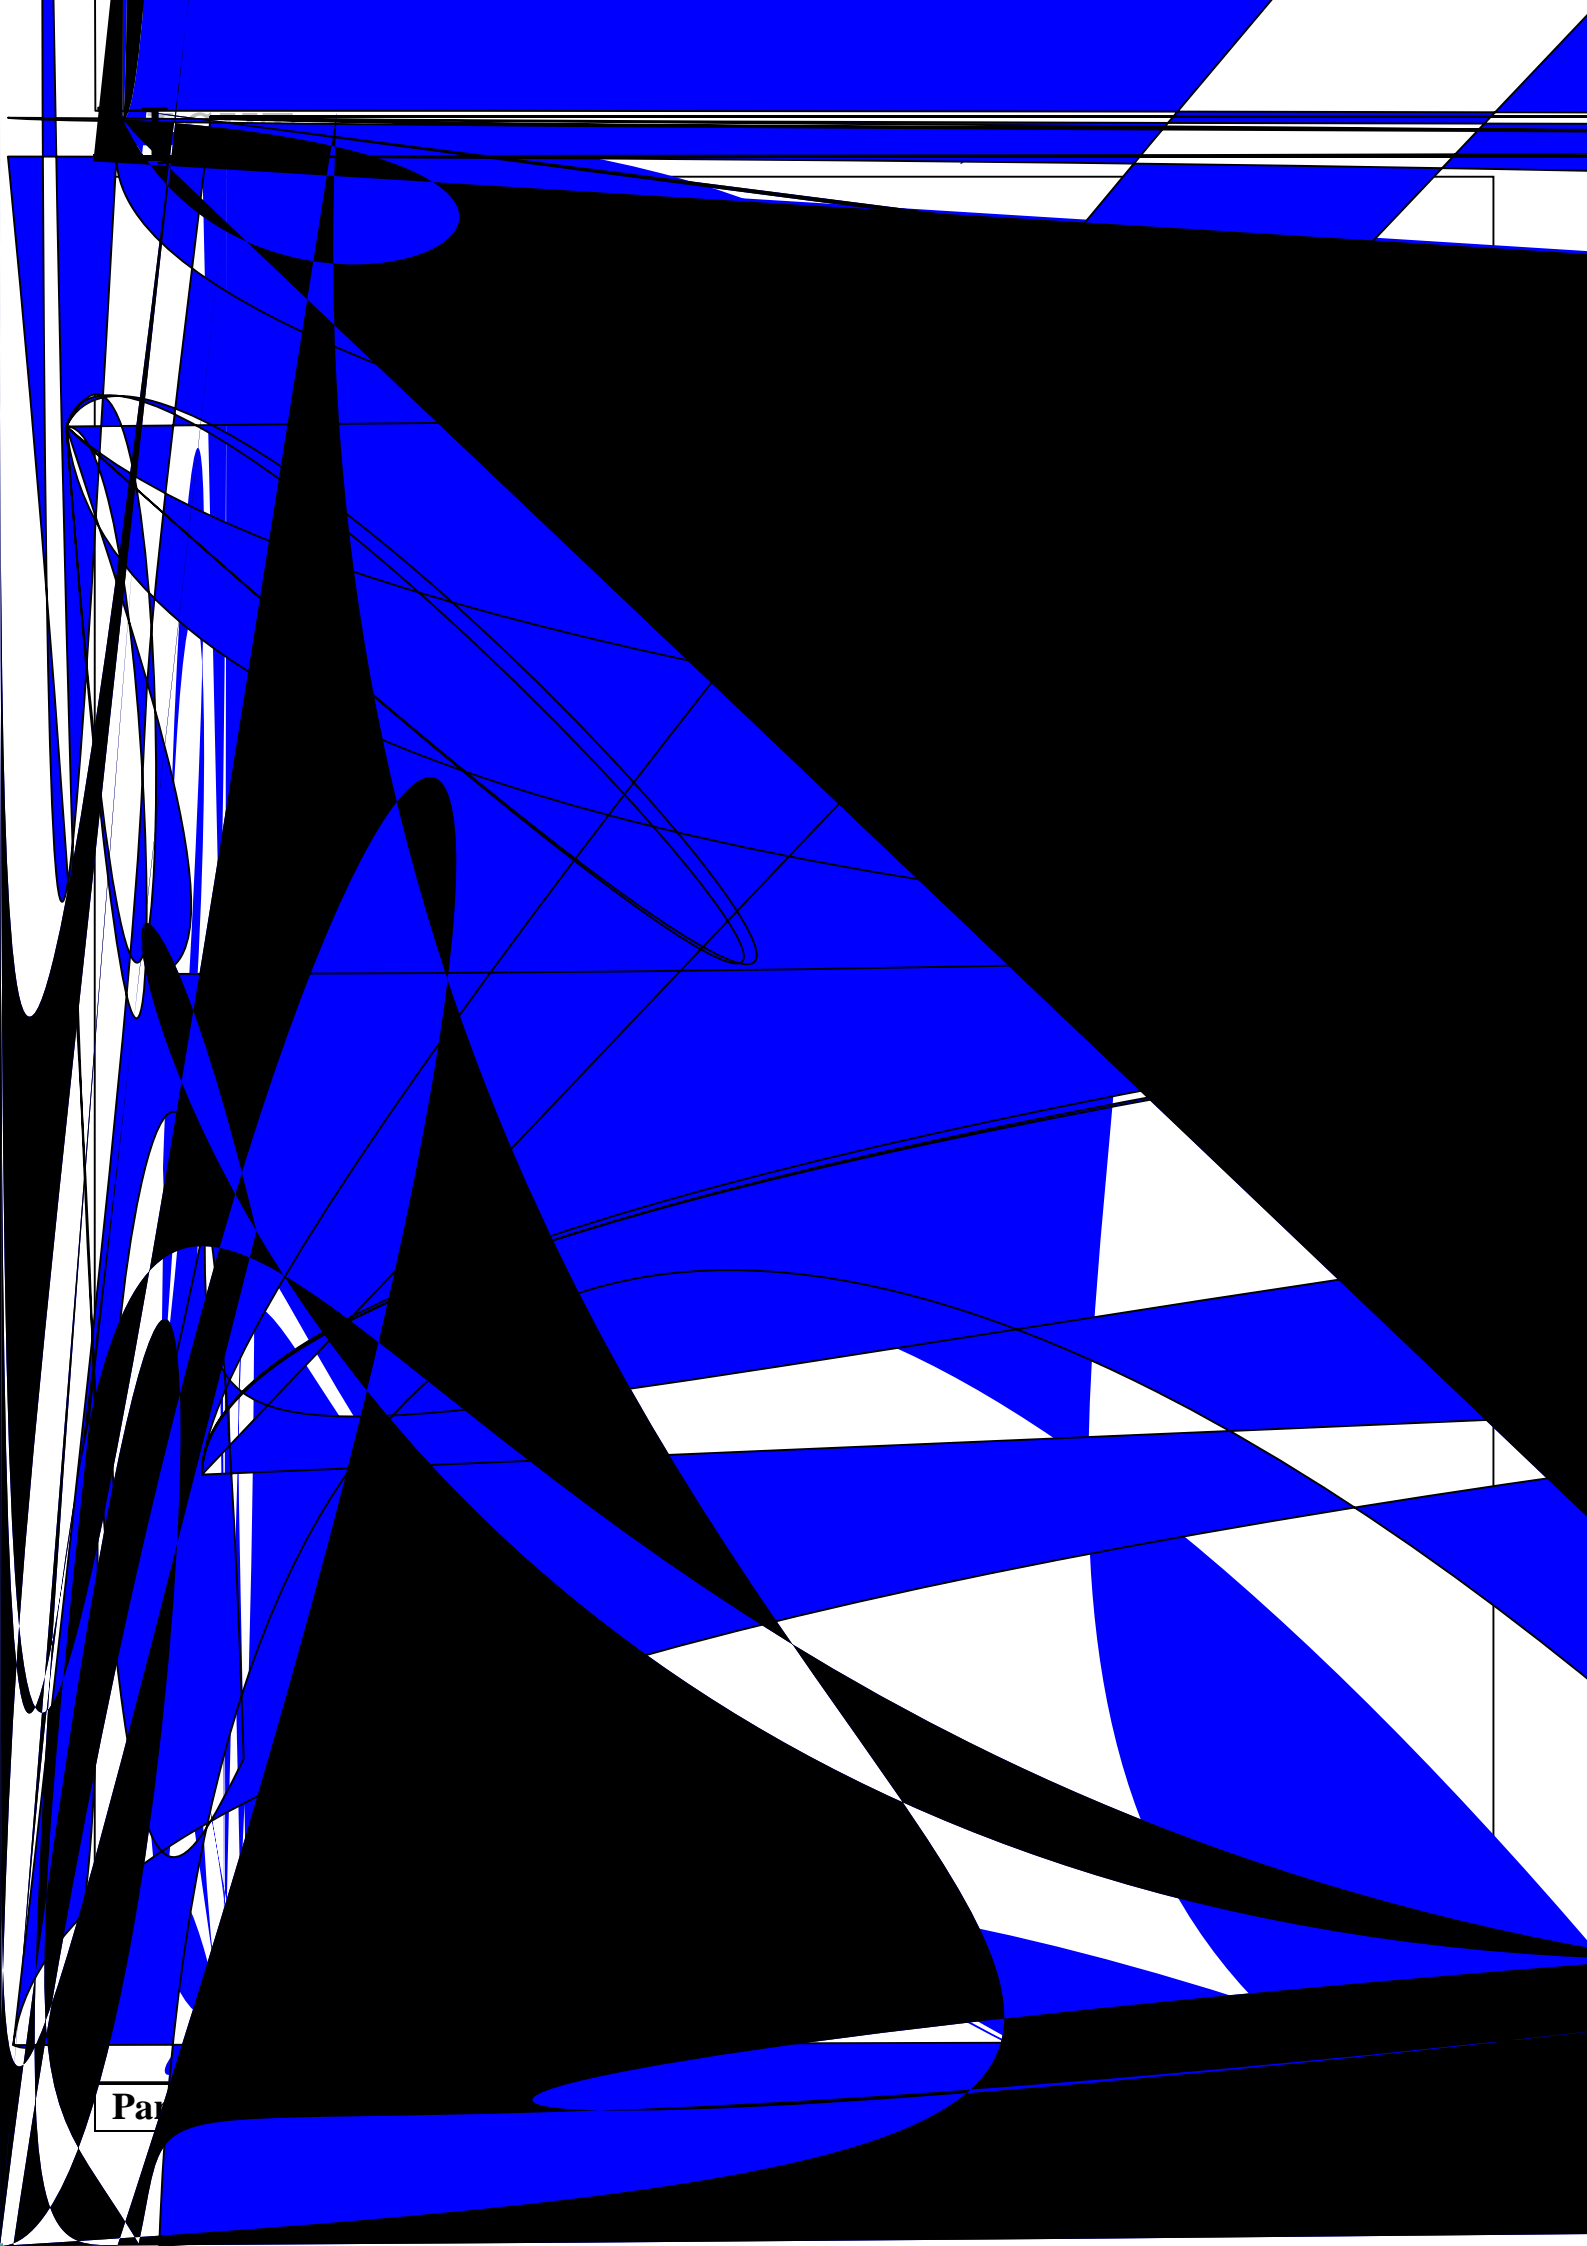
Parameter	MAX.	Unit

1. Storage and operating:

2. Peak Forward Current:

Condition for is IFP pulse: Pulse Width 100μs and duty 1%.

3. Caution in ESD:





Par



Radiant Intensity Bin Code (IF=50mA)

BIN CODE	Min. (mW/sr)	Max. (mW/sr)
31	22	26
32	26	31.9
33	31.9	37
34	37	44
35	44	53

NOTE

Label Explanation

LIGHT Light Electronics CO., LTD.		 LOT NO.: 
MODEL NAME:		
QUANTITY:		
BIN:		
PACKING DATE:		
REMARKS:		

LIGHT Light Electronics CO., LTD.		 LOT NO.: 
MODEL NAME:		
QUANTITY:		
BIN:		
PACKING DATE:		
CUSTOMER P/N:		

Reel Dimensions

