

# LG-03IR4C94C-302BA-T

## DATA SHEET

SPEC. NO. : SZ19092701  
DATE : 2020/07/25  
REV. : A/1

Approved By:


Checked By:

Prepared By:





LIGHT

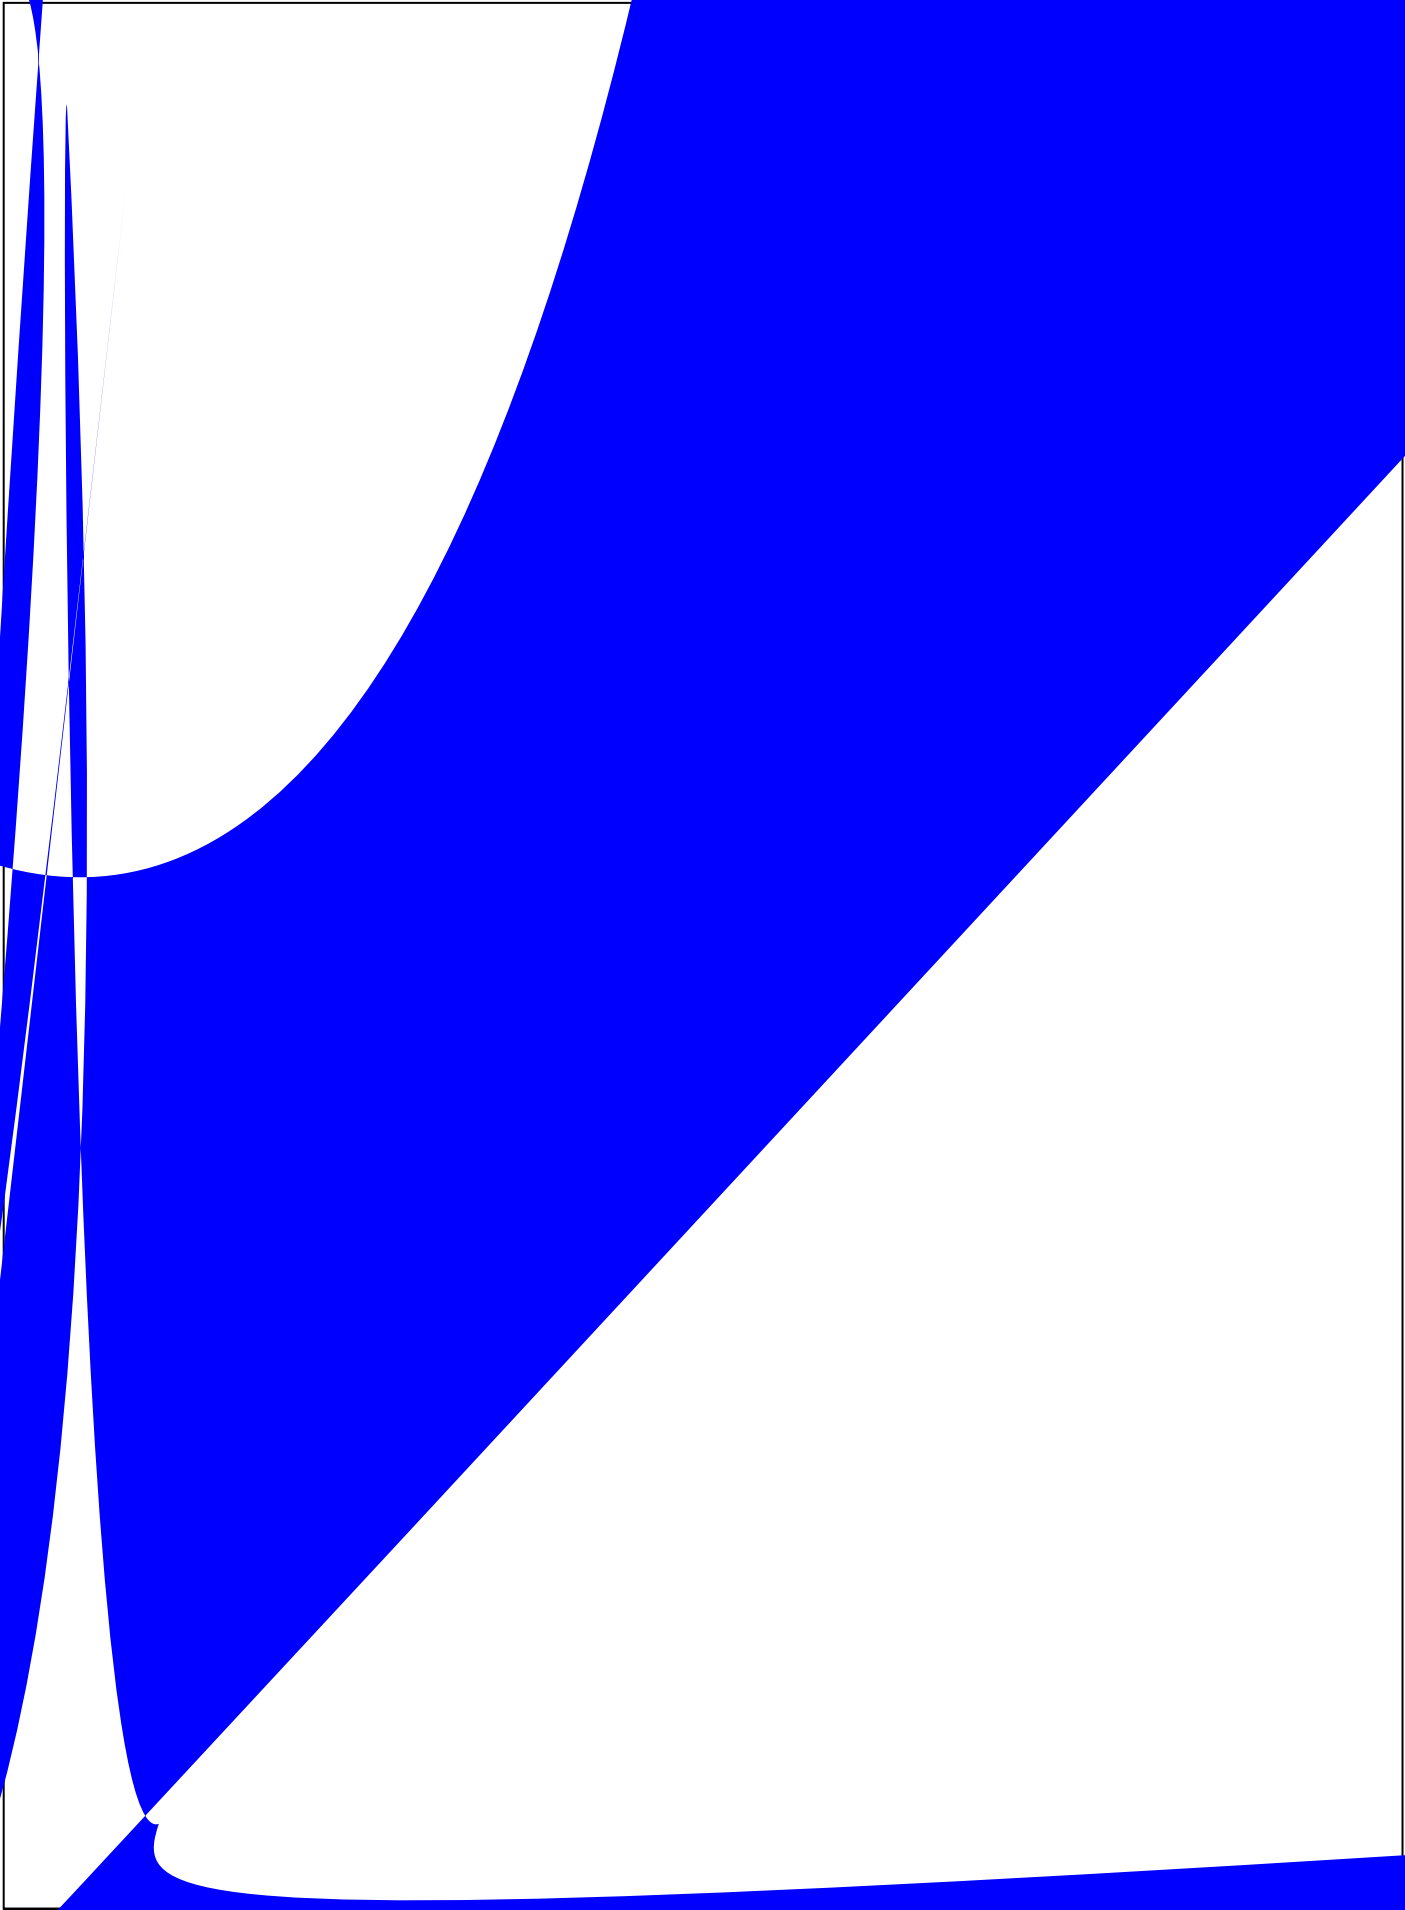

Part No. LG-051K4C-1C-002011

QR-R009-01

o. **LG-03IR4C94C-302BA-T**


LG-QR-K007-01





## LEAD FORMING PROCEDURES

1. Maintain a minimum of 2mm clearance between the base of the LED lens and the first lead bend (Fig.5 and Fig.6).

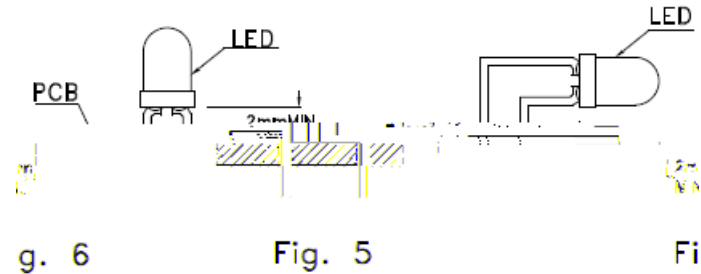


2. Lead forming or bending must be performed before soldering, never during or after soldering.

3. Do not stress the LED lens during lead-forming in order to fractures in the lens epoxy and damage the internal structures.

4. During lead forming, use tools or jigs to hold the leads securely so that the bending force will not be transmitted to the LED lens and its internal structures. Do not perform lead forming once the component has been mounted onto the PCB (Fig.7).

5. Do not bend the leads more than twice(Fig.8)

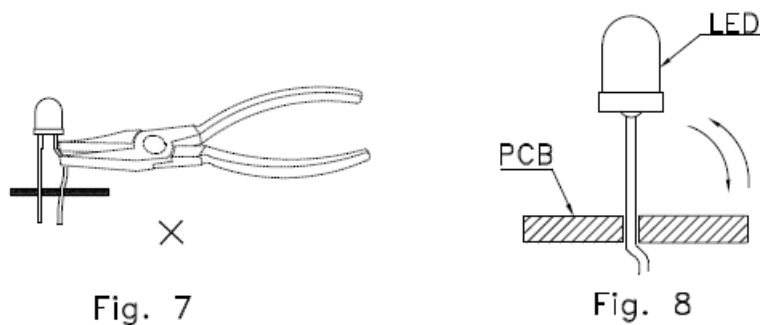

6. After soldering or other high-temperature assembly, allow the LED to cool down to 50 °C before applying force (Fig.9).In general, avoid placing excess force on the LED to avoid damage. For any questions please consult with LIGHT representative for proper handling procedures.

